



6" x 4" Aluminum Tapered Seat Emergency Valve - External Air - 90 Degree Elbow

- Air Operated
- Stainless Trim
- Teflon Encapsulated Seals

Betts High Flow Emergency valves provide increased flow rates compared to 4" emergency valves. Valves feature Teflon encapsulated seals for compatibility with a wide range of products and a special lift mechanism for smooth operation. Body is constructed of aluminum with stainless steel trim. Shear section tested per TTMA RP84 and meets 49CFR178.345-8.


Air operated valves are provided with an external air cylinder to help prevent gasoline or other products from contaminating the air supply. The air cylinder is hard-coated aluminum with a polished stainless steel shaft. Cylinders have 1/8" NPT port for air connection and are supplied with a fusible plug installed.

Available in Long-Radius and Short-Radius elbows. Use the Long-Radius for maximum flow or use the Short-Radius where clearance for piping is restricted.

Left-hand valves are available with air cylinder or cable lever arm on opposite side of valve as shown at right. Add suffix -005 for left-hand option. Add suffix -004 for optional screen.

Assembly Number	Description	Inlet Flange (6" Sump)	Outlet	Dimensions	Weight Fb-MAX Per TTMA RP86
EV46467ALTS	Short Radius Elbow	B.C.: 9.25" [235mm] 12 Holes: .563" Dia. [14.3mm]	4" Grooved O.D. 4.5" [114.3 mm]	A: 4.38" B: 6.25"	16.4lbs 35,000lbs. [15,876kg.]
EV46468ALTS	Short Radius	B.C.: 9.25" [235mm]	4.5" Grooved	A: 4.38"	16.4lbs 35,000lbs.

Assembly Number	Elbow Description	Inlet Flange (6 Holes: .563" Dia. [14.3mm])	Outlet (6 Holes: .563" Dia. [14.3mm])	Dimensions	Weight	Pressure Rating
EV46466	ALTS Short Radius Elbow	B.C.: 9.25" [235mm]	4" TTMA Flanged	A: 4.38"	16.4lbs	35,000lbs. TTMA RP86
		12 Holes: .563" Dia. [14.3mm]	B.C.: 5.88" [149mm]	B: 6.25"		[15,876kg.]
			8 Holes: .438" Dia. [11.1mm]			
EV46473	ALTS Long Radius Elbow	B.C.: 9.25" [235mm]	4" Grooved	A: 9.75"	18.2lbs	13,800lbs. [6,260kg.]
		12 Holes: .563" Dia. [14.3mm]	O.D. 4.5" [114.3mm]	B: 8.13"		
EV46474	ALTS Long Radius Elbow	B.C.: 9.25" [235mm]	4.5" Grooved	A: 9.75"	18.2lbs	13,800lbs. [6,260kg.]
		12 Holes: .563" Dia. [14.3mm]	O.D. 5.0" [127mm]	B: 8.13"		
EV46472	ALTS Long Radius Elbow	B.C.: 9.25" [235mm]	4" TTMA Flanged	A: 9.75"	18.2lbs	13,800lbs. [6,260kg.]
		12 Holes: .563" Dia. [14.3mm]	B.C.: 5.88" [149mm]	B: 6.75"		
			8 Holes: .438" Dia. [11.1mm]			

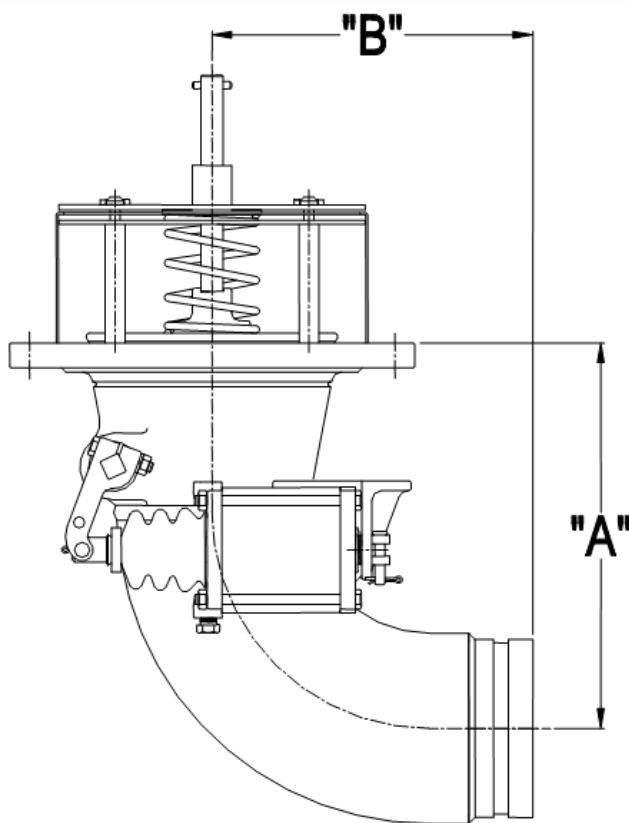

Long Radius Air / Grooved



Replacement Air Actuator (Cylinder)

EB-01-12: Water Flow Rates of Betts Emergency Valves

EB3-00: MAWP and Bursting Pressure Ratings for Betts Valves

EB1-03: Air Emergency Valve System

⚠ WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov. For additional information on Betts products and Proposition 65 list please see: <http://www.bettsind.com/prop-65/>