




4" Piping Weld Flanges (TTMA)

Betts weld flanges are designed for use on cargo tanks with bolt-hole patterns in accordance with TTMA recommended practices. Flange performance is dependent on proper weld procedures with an achievable MAWP of 75 psi [5.2 bar] for steel and stainless and 50 psi [3.4 bar] for aluminum.

Weld Flanges Part No.	Blind Flanges Part No.	Material	Dimensions	Holes	Weight (n/a for blind flanges)
WF401AL	BWF401AL	Alum.	T (Thickness): .375" [9.5 mm] I.D.: 4.57" [116 mm] (n/a for blind flanges) O.D.: 6.63" [168.4 mm] B.C.: 5.88" [149.4 mm]	# of: 8 Dia.: .44" [11.2 mm]	.62 lb. [.28 kg]
WF401MS	BWF401MS	Steel	T (Thickness): .31" [7.9 mm] I.D.: 4.57" [116 mm] (n/a for blind flanges) O.D.: 6.63" [168.4 mm] B.C.: 5.88" [149.4 mm]	# of: 8 Dia.: .44" [11.2 mm]	1.49 lb. [.68 kg]
WF401SS	BWF401SS	316 SS	T (Thickness): .375" [9.5 mm] I.D.: 4.53" [115 mm] (n/a for blind flanges) O.D.: 6.63" [168.4 mm] B.C.: 5.88" [149.4 mm]	# of: 8 Dia.: .44" [11.2 mm]	1.80 lb. [.82 kg]



BLIND FLANGE

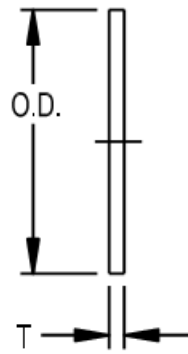

WELD FLANGE

